



BEHIND KERB & CHANNEL  
ON NEW ROADS

UNDER FULL WIDTH  
FULL DEPTH PAVEMENT

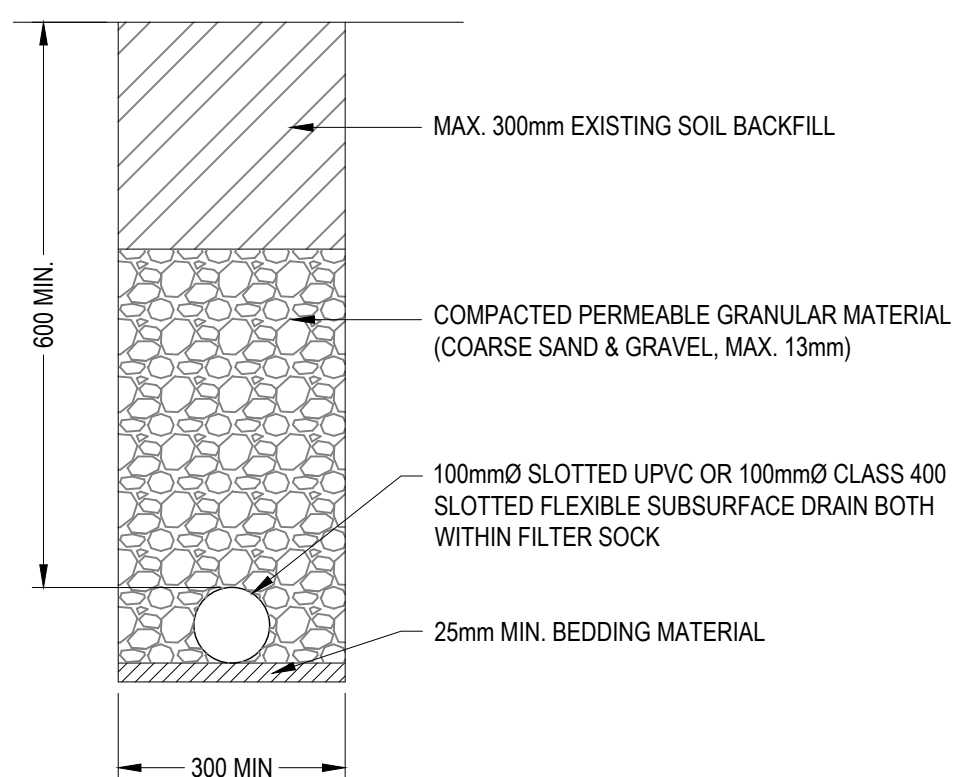


WITHIN PROPERTY

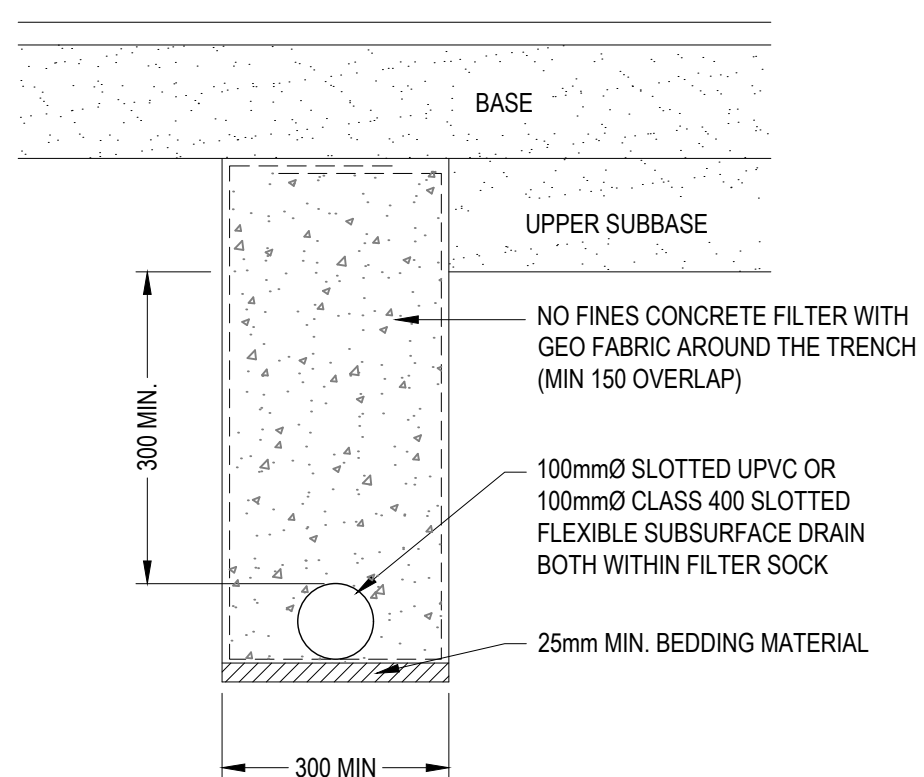

PAVEMENT DRAIN

GENERAL NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE
2. THE DRAINS SHALL BE LAID ON A GRADE PARALLEL TO THE FINISHED SURFACE.
3. FLUSHOUT RISERS TO BE PROVIDED AT THE START OF A RUN.
4. SUBSOIL DRAINAGE PIPE SHALL BE SLOTTED uPVC OR PERFORATED, RIBBED HDPE TO AS2439.1
5. MINIMUM LONGITUDINAL GRADES FOR PIPES SHALL BE: RIBBED HDPE - 1.5%, uPVC PIPE - 1%.
6. uPVC PIPE AND FITTINGS SHALL BE MIN CLASS 12
7. TRENCHES THROUGH EXISTING LANDSCAPED AREAS TO HAVE THE TOP 100mm FILLED WITH LOAM AND SEEDED TO MATCH EXISTING WHERE REQUIRED.

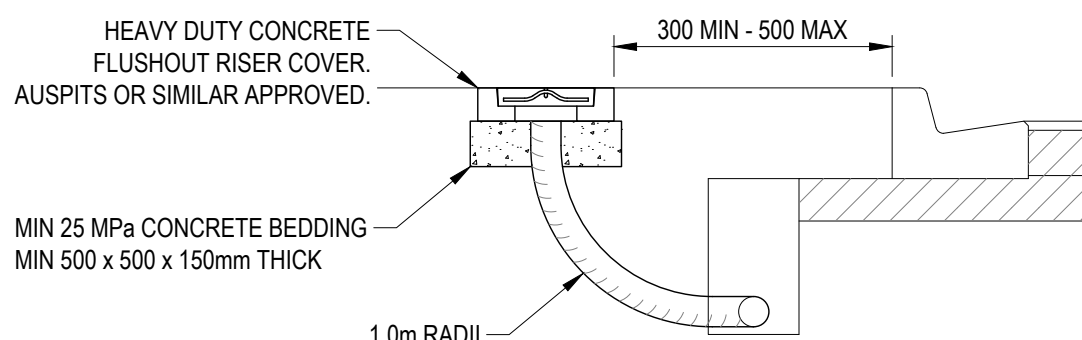

FLUSHOUT RISER DETAIL



Mildura Rural City Council

108 - 116 Madden Avenue Mildura, Vic. 3500  
Ph: (03) 5018 8100

## TYPICAL SUBSURFACE DRAIN SECTIONS

REVISION: 1

SHEET: A3

SCALE: NTS

DATE: 22/10/22

APPROVED: J. JEYAKANTHAN

DRAWING No: **MSD-120**